


国内常用托辊型号规格表


承载托辊

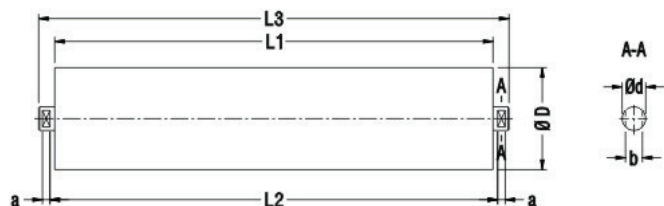

单位(mm)

规格	D	L	轴承型号 C3	LL	L2	b	a	L3	旋转部分质量 (Kg)	质量 (kg)
Φ76-204-160	76	20	6204zz	160	170	14	6	188	1.41	2.09
Φ89-204-160	89			160	170			188	1.64	2.33
Φ89-204-200				200	210			228	1.89	2.68
Φ89-204-250				250	260			278	2.21	3.05
Φ89-204-315				315	325			343	2.62	3.69
Φ89-204-380				380	390			408	3.04	4.20
Φ108-205-200	108	25	6205zz	200	210	18	8	234	2.57	3.75
Φ108-205-250				250	260			284	3.02	4.39
Φ108-205-315				315	325			349	3.61	5.22
Φ108-205-380				380	390			414	4.20	6.06
Φ108-205-465				465	475			499	4.96	7.15
Φ108-205-530				530	540			564	5.55	7.98
Φ133-305-200	133	25	6305zz	200	210	18	8	234	3.62	4.88
Φ133-305-250				250	260			284	4.17	5.63
Φ133-305-315				315	325			349	4.90	6.60
Φ133-305-380				380	390			414	5.63	7.58
Φ133-305-465				465	475			499	6.58	8.85
Φ133-305-530				530	540			564	7.30	9.83
Φ133-305-600				600	610	11	11	642	8.09	10.91
Φ133-305-670				670	680			712	8.87	11.96
Φ133-305-750				750	760			792	9.76	13.16
Φ133-305-800				800	810			842	10.32	13.91
Φ159-306-200	159	30	6306zz	200	210	22	8	234	4.70	6.80
Φ159-306-250				250	260			284	5.73	7.84
Φ159-306-315				315	325			349	6.73	9.19
Φ159-306-380				380	390			414	7.72	10.54
Φ159-306-465				465	475			499	9.02	12.31
Φ159-306-530				530	540			564	10.01	13.66
Φ159-306-600				600	610	11	11	642	11.08	15.16
Φ159-306-670				670	680			712	12.15	16.62
Φ159-306-750				750	760			792	13.38	18.28
Φ159-306-800				800	810			842	14.14	19.32
Φ159-306-900				900	910			942	15.67	21.40
Φ159-306-950				950	960			992	16.43	22.44
Φ194-308-530	194	40	6308zz	530	540	32	13	578	17.96	24.50
Φ194-308-600				600	610			648	19.91	27.14
Φ194-308-670				670	680			718	21.86	29.77
Φ194-308-750				750	760			798	24.08	32.78
Φ194-308-800				800	810			848	25.47	34.66
Φ194-308-900				900	910			948	28.25	38.42
Φ194-308-950				950	960			998	29.65	40.30
Φ194-308-1050				1050	1060			1098	32.43	44.06
Φ194-308-1120				1120	1130			1168	34.37	46.70


回程托辊

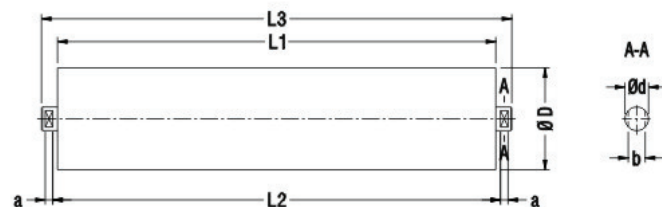

单位(mm)

规格	D	L	轴承型号 C3	L1	L2	b	a	L3	旋转部分质量 (Kg)	质量 (kg)
Φ76-204-500	76	20	6204zz	500	510	14	6	528	3.25	4.76
Φ89-204-500	500			510	528			3.74	5.26	
Φ89-204-600	600			610	628			4.38	6.14	
Φ89-204-750	750			760	778			5.33	7.47	
Φ89-204-950	950			960	978			6.60	9.23	
Φ89-204-1150	1150			1160	1178			7.88	10.99	
Φ108-205-600	108	25	6205zz	600	610	18	8	634	6.20	8.90
Φ108-205-750				750	760			784	7.55	10.83
Φ108-205-950				950	960			984	9.36	13.40
Φ108-205-1150				1150	1160			1184	11.16	15.97
Φ108-205-1400				1400	1410			1434	13.42	19.18
Φ108-205-1600				1600	1610			1634	15.22	21.75
Φ133-305-600	133	25	6305zz	600	610	18	8	634	8.09	10.88
Φ133-305-750				750	760			784	9.76	13.13
Φ133-305-950				950	960			984	12.00	16.13
Φ133-305-1150				1150	1160			1184	14.23	19.13
Φ133-305-1400				1400	1410			1434	17.03	22.88
Φ133-305-1600				1600	1610			1634	19.26	25.88
Φ133-305-1800				1800	1810	11	11	1842	21.50	28.91
Φ133-305-2000				2000	2010			2042	23.73	31.91
Φ133-305-2200				2200	2210			2242	25.97	34.92
Φ133-305-2500				2500	2510			2542	29.32	39.42
Φ159-306-600	159	30	6306zz	600	610	22	8	634	11.08	15.12
Φ159-306-750				750	760			784	13.38	18.24
Φ159-306-950				950	960			984	16.43	22.40
Φ159-306-1150				1150	1160			1184	7.72	26.56
Φ159-306-1400				1400	1410			1434	9.02	31.76
Φ159-306-1600				1600	1610			1634	10.01	35.92
Φ159-306-1800				1800	1810	11	11	1842	11.08	40.12
Φ159-306-2000				2000	2010			2042	12.15	44.28
Φ159-306-2200				2200	2210			2242	13.38	48.44
Φ159-306-2500				2500	2510			2542	14.14	54.68
Φ159-306-2800				2800	2810			2842	15.67	60.92
Φ159-306-3000				3000	3010			3042	16.43	65.08
Φ194-308-1600	194	40	6308zz	1600	1610	32	13	1648	17.96	64.75
Φ194-308-1800				1800	1810			1848	19.91	72.27
Φ194-308-2000				2000	2010			2048	21.86	79.79
Φ194-308-2200				2200	2210			2248	24.08	87.32
Φ194-308-2500				2500	2510			2548	25.47	98.6
Φ194-308-2800				2800	2810			2848	28.25	109.89
Φ194-308-3000				3000	3010			3048	29.65	117.41
Φ194-308-3150				3150	3160			3198	32.43	123.05
Φ194-308-3350				3350	3360			3398	34.37	130.57


槽形托辊组

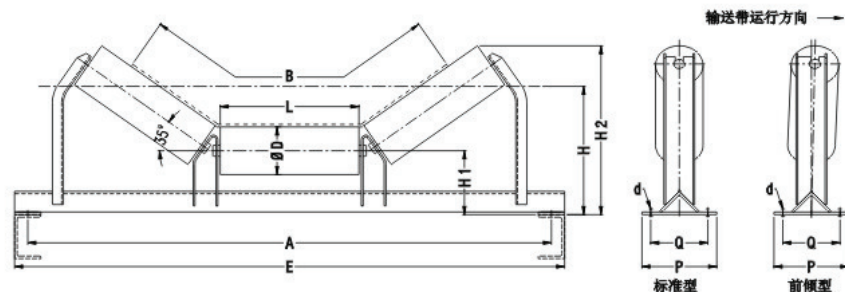

单位(mm)

带宽B	型号	辊子			轴承型号 C3	A	E	H	H1	H2	P	Q	d	质量 (kg)
		辊子型号	D	L										
500	B050-89-204	Φ89-204-200	89	200	6204zz	740	800	220	135.5	298	170	130	M12	15.8
650	B065-89-204	Φ89-204-250	89	250	6204zz	890	950	235	135.5	327	170	130	M12	17.7
	B065-108-205	Φ108-205-250	108		6205zz			265	146	346				22.1
800	B080-89-204	Φ89-204-315	89	315	6204zz	1090	1150	245	135.5	364	170	130	M12	22.8
	B080-108-205	Φ108-205-315	108		6205zz			270	146	383				27.8
1000	B100-108-205	Φ108-205-380	108	380	6205zz	1290	1350	300	159	437	220	170	M16	40.0
	B100-133-305	Φ133-305-380	133		6305zz			325	173.5	461				45.0
1200	B120-108-205	Φ108-205-465	108	465	6205zz	1540	1600	335	176	502	260	200	M16	53.2
	B120-133-305	Φ133-305-465	133		6305zz			360	190.5	527				58.8
1400	B120-159-306	Φ159-306-465	159	530	6306zz	1740	1800	390	207.5	556	280	220	M16	70.5
	B140-108-205	Φ108-205-530	108		6205zz			350	184	548				59.1
1600	B140-133-305	Φ133-305-530	133	600	6305zz	1980	2050	380	198.5	573	300	240	M16	65.3
	B140-159-306	Φ159-306-530	159		6306zz			410	215.2	603				86.2
1800	B160-133-305	Φ133-305-600	133	670	6305zz	2180	2250	425	212.5	629	340	270	M16	101.25
	B160-159-306	Φ159-306-600	159		6306zz			450	225.5	653				114.85
2000	B160-194-308	Φ194-308-600	194	750	6308zz	2420	2500	485	246.5	674	340	270	M16	154.45
	B180-133-305	Φ133-305-670	133		6305zz			440	212.5	670				110.35
2200	B180-159-306	Φ159-306-670	159	800	6306zz	2720	2800	465	225.5	693	340	270	M16	125.35
	B180-194-308	Φ194-308-670	194		6308zz			500	246.5	714				168.65
2400	B200-133-305	Φ133-305-750	133	900	6305zz	3020	3110	470	222.5	725	340	270	M20	129.22
	B200-159-306	Φ159-306-750	159		6306zz			495	235.5	749				152.92
	B200-194-308	Φ194-308-750	194		6308zz			530	252.5	783				199.22
	B220-159-306	Φ159-306-800	159		6306zz			515	235.5	778				164.3
	B220-194-308	Φ194-308-800	194		6308zz			550	252.5	812				214.0
	B240-159-307	Φ159-307-900	159		6307zz			570	232.5	828				230.7
	B240-194-308	Φ194-308-900	194		6308zz			620	265	878				258.1


平行下托辊组

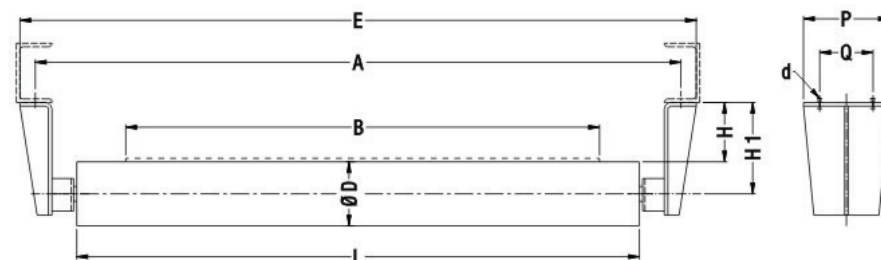

单位(mm)

带宽B	型号	辊子			轴承型号 C3	A	E	H	H1	P	Q	d	质量 (kg)
		辊子型号	D	L									
500	B050-89-204	Φ89-204-600	89	600	6204zz	740	792	55.5	100	145	90	M12	9.45
650	B065-89-204	Φ89-204-750	89	750	6204zz	890	942	55.5	100	145	90	M12	10.75
	B065-108-205	Φ108-205-750	108		6205zz			55.5	109.5				14.25
800	B080-89-204	Φ89-204-950	89	950	6204zz	1090	1142	100	144.5	145	90	M12	13.35
	B080-108-205	Φ108-205-950	108		6205zz			100	154				17.85
1000	B080-133-305	Φ133-305-950	133	1150	6305zz	1290	1342	100	166.5	150	90	M16	20.65
	B100-108-205	Φ108-205-1150	108		6205zz			110	164				21.25
1200	B100-133-305	Φ133-305-1150	133	1400	6305zz	1540	1592	110	176.5	150	90	M16	24.55
	B100-159-306	Φ159-306-1150	159		6306zz			110	189.5				32.25
1400	B120-108-205	Φ108-205-1400	108	1600	6205zz	1740	1800	120	174	150	90	M16	24.82
	B120-133-305	Φ133-305-1400	133		6305zz			120	186.5				29.22
1600	B120-159-306	Φ159-306-1400	159	1800	6306zz	1980	2050	120	199.5	300	240	M16	38.42
	B140-108-205	Φ108-205-1600	108		6205zz			130	184				27.52
1800	B140-133-305	Φ133-305-1600	133	2000	6305zz	2180	2250	130	196.5	340	270	M16	32.02
	B140-159-306	Φ159-306-1600	159		6306zz			130	209.5				42.42
2000	B160-133-305	Φ133-305-1800	133	2200	6305zz	2420	2500	165	231.5	340	270	M16	52.15
	B160-159-306	Φ159-306-1800	159		6306zz			165	224.5				64.35
2200	B160-194-308	Φ194-308-1800	194	2500	6308zz	2720	2800	165	262	340	270	M16	99.85
	B180-133-305	Φ133-305-2000	133		6305zz			170	236.5				58.35
2400	B180-159-306	Φ159-306-2000	159		6306zz			170	249.5				71.85
	B180-194-308	Φ194-308-2000	194		6308zz			170	267				111.85
	B200-133-305	Φ133-305-2200	133		6305zz			200	266.5				63.02
	B200-159-306	Φ159-306-2200	159		6306zz			200	279.5				77.72
	B200-194-308	Φ194-308-2200	194		6308zz			200	297				118.52
	B220-159-306	Φ159-306-2500	159		6306zz			215	294.5				85.02
	B220-194-308	Φ194-308-2500	194		6308zz			215	312				131.82
	B240-159-308	Φ159-308-2800	159		6308zz			230	309.5				108.32
	B240-194-309	Φ194-309-2800	194		6309zz			230	327				156.52


缓冲托辊组

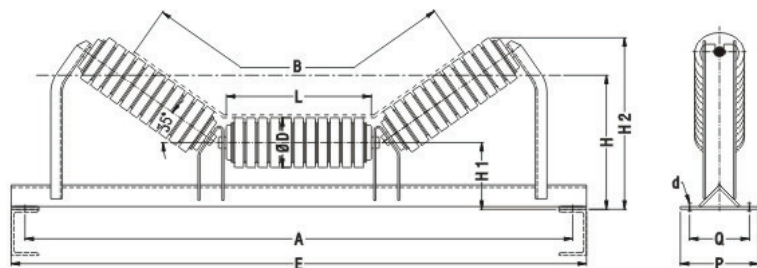

单位(mm)

带宽B	型号	辊子			轴承型号 C3	A	E	H	H1	H2	P	Q	d	质量 (kg)
		辊子型号	D	L										
500	B050-89-204	Φ89-204-200	89	200	6204zz	740	800	220	135.5	298	170	130	M12	18.15
650	B065-89-204	Φ89-204-250	89	250	6204zz	890	950	235	135.5	327	170	130	M12	21.35
	B065-108-205	Φ108-205-250	108		6205zz			265	146	346				27.45
800	B080-89-204	Φ89-204-315	89	315	6204zz	1090	1150	245	135.5	364	170	130	M12	27.55
	B080-108-205	Φ108-205-315	108		6205zz			270	146	383				35.05
1000	B100-108-205	Φ108-205-380	108	380	6205zz	1290	1350	300	159	437	220	170	M16	49.25
	B100-133-305	Φ133-305-380	133		6305zz			325	173.5	461				55.25
1200	B120-108-205	Φ108-205-465	108	465	6205zz	1540	1600	335	176	502	260	200	M16	65.12
	B120-133-305	Φ133-305-465	133		6305zz			360	190.5	527				72.22
	B120-159-306	Φ159-306-465	159		6306zz			390	207.5	556				88.02
1400	B140-108-205	Φ108-205-530	108	530	6205zz	1740	1800	350	184	548	280	220	M16	73.02
	B140-133-305	Φ133-305-530	133		6305zz			380	198.5	573				77.42
	B140-159-306	Φ159-306-530	159		6306zz			410	215.2	603				106.32
1600	B160-133-305	Φ133-305-600	133	600	6305zz	1980	2050	425	212.5	629	300	240	M16	119.15
	B160-159-306	Φ159-306-600	159		6306zz			450	225.5	653				137.25
	B160-194-308	Φ194-308-600	194		6308zz			485	246.5	674				173.05
1800	B180-133-305	Φ133-305-670	133	670	6305zz	2180	2250	440	212.5	670	340	270	M16	130.65
	B180-159-306	Φ159-306-670	159		6306zz			465	225.5	693				150.45
	B180-194-308	Φ194-308-670	194		6308zz			500	246.5	714				187.95
2000	B200-133-305	Φ133-305-750	133	750	6305zz	2420	2500	470	222.5	725	340	270	M16	153.62
	B200-159-306	Φ159-306-750	159		6306zz			495	235.5	749				181.82
	B200-194-308	Φ194-308-750	194		6308zz			530	252.5	783				221.32
2200	B220-159-306	Φ159-306-800	159	800	6306zz	2720	2800	515	235.5	778	340	270	M16	194.52
	B220-194-308	Φ194-308-800	194		6308zz			550	252.5	812				239.82
2400	B240-159-307	Φ159-307-900	159	900	6307zz	3020	3110	570	232.5	828	340	270	M20	266.52
	B240-194-308	Φ194-308-900	194		6308zz			620	265	878				304.22


螺旋托辊组

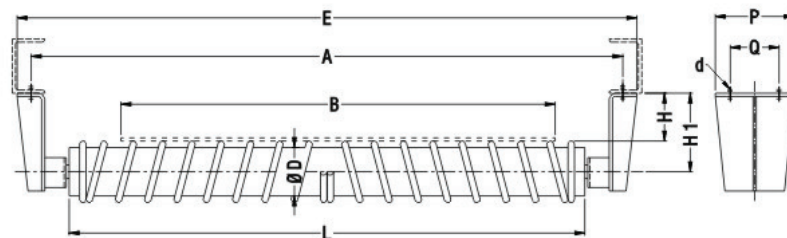

单位(mm)

带宽B	型号	辊子			轴承型号 C3	A	E	H	H1	P	Q	d	质量 (kg)
		辊子型号	D	L									
500	B050-89-204	Φ89-204-600	89	600	6204zz	740	792	55.5	100	145	90	M12	16.75
650	B065-89-204	Φ89-204-750	89	750	6204zz	890	942	55.5	100	145	90	M12	19.85
	B065-108-205	Φ108-205-750	108		6205zz			55.5	109.5				20.25
800	B080-89-204	Φ89-204-950	89	950	6204zz	1090	1142	100	144.5	145	90	M12	24.95
	B080-108-205	Φ108-205-950	108		6205zz			100	154				25.65
	B080-133-305	Φ133-305-950	133		6305zz			100	166.5				29.85
	B100-108-205	Φ108-205-1150	108		6205zz			110	164				30.85
1000	B100-133-305	Φ133-305-1150	133	1150	6305zz	1290	1342	110	176.5	150	90	M16	34.55
	B100-159-306	Φ159-306-1150	159		6306zz			110	189.5				42.95
1200	B120-108-205	Φ108-205-1400	108	1400	6205zz	1540	1592	120	174	150	90	M16	36.32
	B120-133-305	Φ133-305-1400	133		6305zz			120	186.5				41.52
	B120-159-306	Φ159-306-1400	159		6306zz			120	199.5				51.52
1400	B140-108-205	Φ108-205-1600	108	1600	6205zz	1740	1800	130	184	150	90	M16	40.82
	B140-133-305	Φ133-305-1600	133		6305zz			130	196.5				46.12
	B140-159-306	Φ159-306-1600	159		6306zz			130	209.5				57.42
1600	B160-133-305	Φ133-305-1800	133	1800	6305zz	1980	2050	165	231.5	300	240	M16	68.75
	B160-159-306	Φ159-306-1800	159		6306zz			165	224.5				82.05
	B160-194-308	Φ194-308-1800	194		6308zz			165	262				101.35
1800	B180-133-305	Φ133-305-2000	133	2000	6305zz	2180	2250	170	236.5	340	270	M16	76.95
	B180-159-306	Φ159-306-2000	159		6306zz			170	249.5				91.65
	B180-194-308	Φ194-308-2000	194		6308zz			170	267				113.45
2000	B200-133-305	Φ133-305-2200	133	2200	6305zz	2420	2500	200	266.5	340	270	M16	83.52
	B200-159-306	Φ159-306-2200	159		6306zz			200	279.5				99.52
	B200-194-308	Φ194-308-2200	194		6308zz			200	297				120.22
2200	B220-159-306	Φ159-306-2500	159	2500	6306zz	2720	2800	215	294.5	340	270	M16	110.02
	B220-194-308	Φ194-308-2500	194		6308zz			215	312				134.02
2400	B240-159-308	Φ159-308-2800	159	2800	6308zz	3020	3110	230	309.5	340	270	M20	136.52
	B240-194-309	Φ194-309-2800	194		6309zz			230	327				158.92


挡辊式上调心托辊组

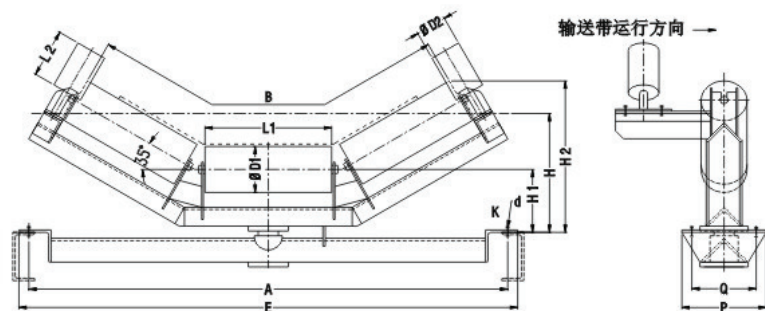

单位(mm)

带宽B	型号	辊子			轴承型号 C3	D2	L2	A	E	H	H1	H2	P	Q	d	质量 (kg)
		辊子型号	D	L												
500	B050-89-204	Φ89-204-200	89	200	6204zz	76	120	740	800	220	135.5	298	170	130	M12	24.35
650	B065-89-204	Φ89-204-250	89	250	6204zz	76	120	890	950	235	135.5	327	170	130	M12	27.75
	B065-108-205	Φ108-205-250	108		6205zz					265	146	346				31.75
800	B080-89-204	Φ89-204-315	89	315	6204zz	89	150	1090	1150	245	135.5	364	170	130	M12	36.55
	B080-108-205	Φ108-205-315	108		6205zz					270	146	383				41.25
1000	B100-108-205	Φ108-205-380	108	380	6205zz	89	150	1290	1350	300	159	437	220	170	M16	56.55
	B100-133-305	Φ133-305-380	133		6305zz					325	173.5	461				61.25
1200	B120-108-205	Φ108-205-465	108	465	6205zz	89	150	1540	1600	335	176	502	260	200	M16	68.92
	B120-133-305	Φ133-305-465	133		6305zz					360	190.5	527				74.22
	B120-159-306	Φ159-306-465	159		6306zz					390	207.5	556				84.82
1400	B140-108-205	Φ108-205-530	108	530	6205zz	108	180	1740	1800	350	184	548	280	220	M16	163.82
	B140-133-305	Φ133-305-530	133		6305zz					380	198.5	573				169.52
	B140-159-306	Φ159-306-530	159		6306zz					410	215.2	603				181.42
1600	B160-133-305	Φ133-305-600	133	600	6305zz	108	180	1980	2050	425	212.5	629	300	240	M16	158.35
	B160-159-306	Φ159-306-600	159		6306zz					450	225.5	653				171.45
	B160-194-308	Φ194-308-600	194		6308zz					485	246.5	674				211.15
1800	B180-133-305	Φ133-305-670	133	670	6305zz	108	180	2180	2250	440	212.5	670	340	270	M16	188.05
	B180-159-306	Φ159-306-670	159		6306zz					465	225.5	693				202.45
	B180-194-308	Φ194-308-670	194		6308zz					500	246.5	714				245.95
2000	B200-133-305	Φ133-305-750	133	750	6305zz	108	180	2420	2500	470	222.5	725	340	270	M16	219.22
	B200-159-306	Φ159-306-750	159		6306zz					495	235.5	749				235.02
	B200-194-308	Φ194-308-750	194		6308zz					530	252.5	783				280.72
2200	B220-159-306	Φ159-306-800	159	800	6306zz	108	180	2720	2800	515	235.5	778	340	270	M16	321.0
	B220-194-308	Φ194-308-800	194		6308zz					550	252.5	812				369.2
2400	B240-159-307	Φ159-307-900	159	900	6307zz	108	180	3020	3110	570	232.5	828	340	270	M20	360.3
	B240-194-308	Φ194-308-900	194		6308zz					620	265	878				405.7


挡辊式下调心托辊组

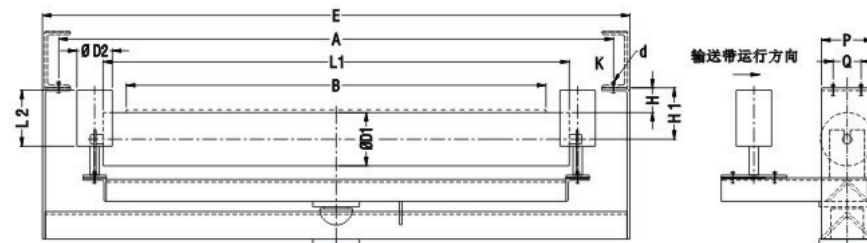

单位(mm)

带宽B	型号	辊子			轴承型号 C3	D2	L2	A	E	H	H1	P	Q	d	质量 (kg)
		辊子型号	D1	L1											
500	B050-89-204	Φ89-204-600	89	600	6204zz	76	120	740	800	55.5	100	170	130	M12	26.85
650	B065-89-204	Φ89-204-750	89	750	6204zz	76	120	890	950	55.5	100	170	130	M12	28.75
	B065-108-205	Φ108-205-750	108		6205zz					55.5	109.5				33.15
800	B080-89-204	Φ89-204-950	89	950	6204zz	89	150	1090	1150	100	144.5	170	130	M12	36.65
	B080-108-205	Φ108-205-950	108		6205zz					100	145				40.85
1000	B100-108-205	Φ108-205-1150	108	1150	6205zz	89	150	1290	1350	110	164	220	170	M16	55.85
	B100-133-305	Φ133-305-1150	133		6305zz					110	176.5				59.05
1200	B120-108-205	Φ108-205-1400	108	1400	6205zz	89	150	1540	1600	120	174	260	200	M16	73.42
	B120-133-305	Φ133-305-1400	133		6305zz					120	186.5				77.22
	B120-159-306	Φ159-306-1400	159		6306zz					120	199.5				86.32
1400	B140-108-205	Φ108-205-1600	108	1600	6205zz	108	180	1740	1800	130	184	280	220	M16	109.42
	B140-133-305	Φ133-305-1600	133		6305zz					130	196.5				113.72
	B140-159-306	Φ159-306-1600	159		6306zz					130	209.5				123.72
1600	B160-133-305	Φ133-305-1800	133	1800	6305zz	108	180	1980	2050	165	231.5	300	240	M16	133.45
	B160-159-306	Φ159-306-1800	159		6306zz					165	244.5				147.55
	B160-194-308	Φ194-308-1800	194		6308zz					165	262				188.85
1800	B180-133-305	Φ133-305-2000	133	2000	6305zz	108	180	2180	2250	170	236.5	340	270	M16	160.45
	B180-159-306	Φ159-306-2000	159		6306zz					170	249.5				181.65
	B180-194-308	Φ194-308-2000	194		6308zz					170	267				219.15
2000	B200-133-305	Φ133-305-2200	133	2200	6305zz	108	180	2420	2500	200	266.5	340	270	M16	174.82
	B200-159-306	Φ159-306-2200	159		6306zz					200	279.5				188.32
	B200-194-308	Φ194-308-2200	194		6308zz					200	297				227.62
2200	B220-159-306	Φ159-306-2500	159	2500	6306zz	108	180	2720	2800	215	294.5	340	270	M16	280.92
	B220-194-308	Φ194-308-2500	194		6308zz					215	312				335.02
2400	B240-159-307	Φ159-307-2800	159	2800	6307zz	108	180	3020	3110	230	309.5	340	270	M20	331.12
	B240-194-308	Φ194-308-2800	194		6308zz					230	327				372.82


摩擦上调心托辊组

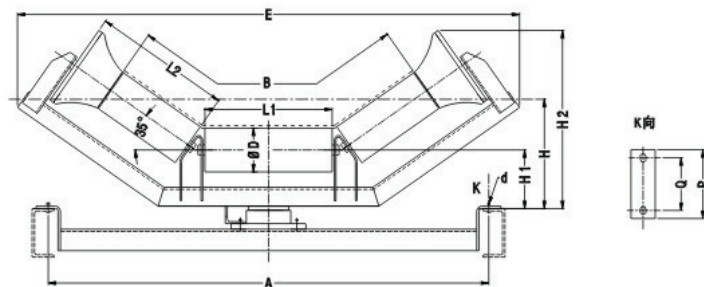

单位(mm)

带宽B	型号	摩擦辊型号	普通辊子型号	D	L1	L2	A	E	H	H1	H2	轴承型号 C3	P	Q	d	质量 (kg)
500	B050-89-204	Φ89-204-230	CR-RS-89-204-200	89	200	230	740	912	220	135.5	346.5	6204zz	170	130	M12	48.25
650	B065-89-204	Φ89-204-280	CR-RS-89-204-250	89	250	280	890	1055	235	135.5	375	6204zz	170	130	M12	51.75
	B065-108-205	Φ108-205-294	CR-RS-108-205-250	108		294		1100	265	146	375	6205zz				51.85
800	B080-89-204	Φ89-204-323	CR-RS-89-204-315	89	315	323		1183	245	135.5	400	6204zz	170	130	M12	59.05
	B080-108-205	Φ108-205-342	CR-RS-108-205-315	108		342	1090	1243	270	146	440	6205zz				73.25
	B080-133-305	Φ133-305-348	CR-RS-133-305-315	133		348		1276	305	159.5	471	6305zz				93.9
1000	B100-108-205	Φ108-205-405	CR-RS-108-205-380	108	380	405		1439	300	159	487.5	6205zz	220	170	M16	85.95
	B100-133-305	Φ133-305-412	CR-RS-133-305-380	133		412	1290	1520	325	173.5	505	6305zz				107.75
	B100-159-306	Φ159-306-429	CR-RS-159-306-380	159		429		1535	370	190.5	564	6306zz				136.61
1200	B120-108-205	Φ108-205-465	CR-RS-108-205-465	108	465	465		1639	335	176	544	6205zz	260	200	M16	100.92
	B120-133-305	Φ133-305-473	CR-RS-133-305-465	133		473	1540	1715	360	190.5	590	6305zz				120.42
	B120-159-306	Φ159-306-494	CR-RS-159-306-465	159		494		1717	390	207.5	607	6306zz				125.82
1400	B140-108-205	Φ108-205-533	CR-RS-108-205-530	108	533	533		1814	350	184	590	6205zz	280	220	M16	102.62
	B140-133-305	Φ133-305-540	CR-RS-133-305-530	133		540	1740	1887	380	198.5	635	6305zz				131.12
	B140-159-306	Φ159-306-553	CR-RS-159-306-530	159		553		1914	410	215.5	660	6306zz				136.82
1600	B160-159-306	Φ159-306-630	CR-RS-159-306-600	159	600	630	1980	2050	450	247	780	6306zz	300	240	M16	180.05
	B160-159-308	Φ159-308-630	CR-RS-159-308-600	159				2050	450	247	780	6308zz				194.95


摩擦下调心托辊组

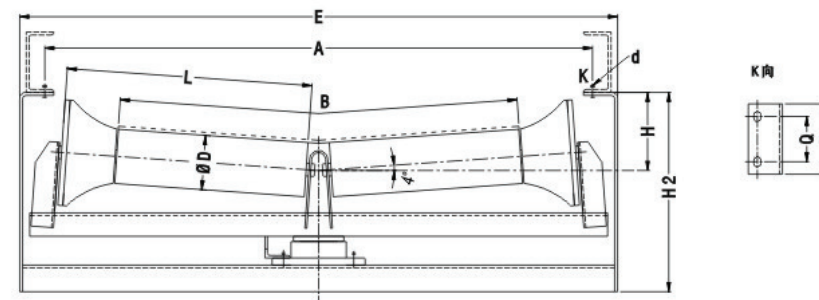

单位(mm)

带宽B	型号	辊子			轴承型号 C3	A	E	H	H2	P	Q	d	质量 (kg)
		辊子型号	D	L									
500	B050-89-204	Φ89-204-323	89	323	6204zz	740	840	55.5	334	130	90	M12	50.65
650	B065-89-204	Φ89-204-398	89	398	6204zz	890	990	55.5	323	130	90	M12	54.55
	B065-108-205	Φ108-205-398	108	398	6205zz				358.5				66.65
800	B080-89-204	Φ89-204-473	89	473	6204zz	1090	1190	100	367.5	130	90	M12	60.45
	B080-108-205	Φ108-205-488	108	488	6205zz				396				74.55
	B080-133-305	Φ133-305-488	133	488	6305zz								90.25
1000	B100-108-205	Φ108-205-590	108	590	6205zz	1290	1376	110	411	130	90	M16	87.75
	B100-133-305	Φ133-305-590	133	590	6305zz				443.5				104.55
	B100-159-306	Φ159-306-599	159	599	6306zz				476.5				108.85
1200	B120-108-205	Φ108-205-690	108	690	6205zz	1540	1626	120	426	130	90	M16	94.22
	B120-133-305	Φ133-305-690	133	690	6305zz				460.5				114.22
	B120-159-306	Φ159-306-699	159	699	6306zz				520				125.72
1400	B140-108-205	Φ108-205-790	108	790	6205zz	1740	1826	130	441	130	90	M16	100.02
	B140-133-305	Φ133-305-790	133	790	6305zz				463.5				124.82
	B140-159-306	Φ159-306-799	159	799	6306zz				527.5				155.72


锥形上调心托辊组

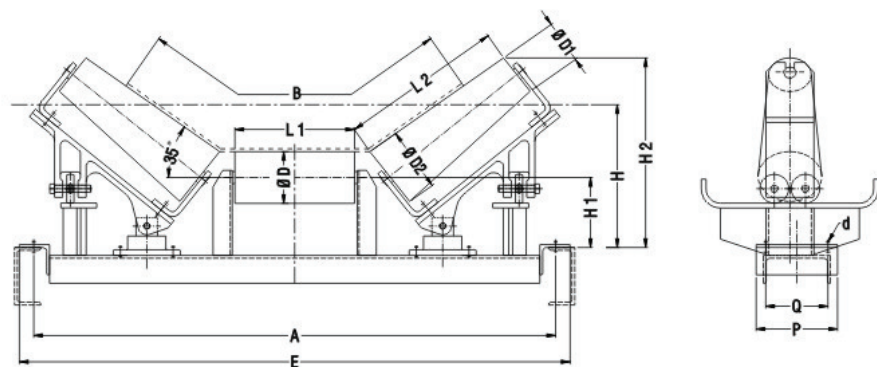

单位(mm)

带宽B	型号	摩擦辊型号	普通辊子型号	D	D1	D2	A	E	H	L1	L2	轴承型号 C3	P	Q	d	质量(kg)
800	B080-108-205	Φ89(133)-205-340	CR-RS-108-205-250	108	89	133	1090	1150	1150	250	340	6205zz	170	130	M12	71.05
	B080-133-305	Φ108(159)-205-340	CR-RS-133-305-450	133	108	159						6305zz				71.25
1000	B100-133-305	Φ108(159)-305-415	CR-RS-133-305-315	133	108	159	1290	1350	1350	315	415	6305zz	220	170	M16	73.05
	B100-159-306	Φ108(159)-306-415	CR-RS-159-306-315	159	108	159						6306zz				91.65
1200	B120-133-305	Φ108(176)-305-500	CR-RS-133-305-380	133	108	176	1540	1600	1600	380	500	6305zz	260	200	M16	105.72
	B120-159-306	Φ133(194)-306-500	CR-RS-159-306-380	159	133	194						6306zz				109.62
1400	B140-133-305	Φ108(176)-305-550	CR-RS-133-305-465	133	108	176	1740	1800	1800	465	550	6305zz	280	220	M16	99.92
	B140-159-306	Φ133(194)-306-550	CR-RS-159-306-465	159	133	194						6306zz				110.22
1600	B160-159-307	Φ133(219)-307-600	CR-RS-159-307-530	159	133	219	1980	2050	2050	530	600	6307zz	300	240	M16	194.65
	B160-159-308	Φ133(219)-308-600	CR-RS-159-308-530									6308zz				199.75
1800	B180-159-307	Φ133(219)-307-670	CR-RS-159-307-600	159	133	219	2180	2250	2250	600	670	6307zz	340	270	M16	226.25
	B180-159-308	Φ133(219)-308-670	CR-RS-159-308-600									6308zz				229.35

锥形下调心托辊组

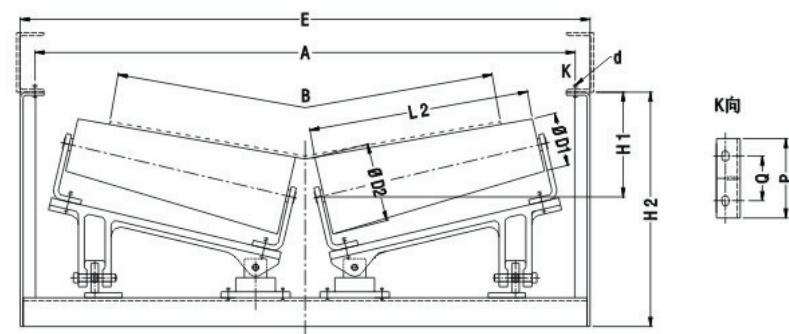

单位(mm)

带宽B	型号	辊子	D1	L2	轴承型号 C3	L	A	E	H1	H2	P	Q	d	质量 (kg)
		辊子型号												
800	B080-108-305	Φ108(159)-305-445	108	159	6305zz	445	1090	1150	217	452	160	90	M12	72.45
1000	B100-108-305	Φ108(176)-305-560	108	176	6305zz	560	1290	1350	254	532	160	90	M16	84.05
1200	B120-108-306	Φ108(194)-306-680	108	194	6306zz	680	1540	1600	272	557	180	90	M16	92.02
1400	B140-108-306	Φ108(194)-306-780	108	194	6306zz	780	1740	1800	291	578	180	90	M16	121.42
1600	B160-133-308	Φ133(219)-308-880	133	219	6308zz	880	1980	2050	326	613	300	240	M16	162.75
1800	B180-133-308	Φ133(219)-308-980	133	219	6308zz	980	2180	2250	331	618	300	240	M16	192.55